



Aquatuff is a water based interior/ exterior acrylic emulsion paint that dries to sheen, ultra-tough finish, which is specially designed to impart high adhesion high water resistance and excellent durability. Therefore it can be used as a water proof solution.

KEY BENEFITS



Suitable for both interior and exterior applications.



Dries to a sheen finish and offers an ultra-tough coating.



Designed to provide high adhesion, water resistance, and durability.



Can be used as a waterproof solution due to its properties.

AVAILABLE PACKAGE SIZES



AVAILABLE COLOUR RANGE




Refer Robbialac Website / Colour Card

FINISH

Sheen

VOLUME SOLIDS



DRYING TIME



Under normal drying conditions the surface will be touch dry within 1-2 hours.



Re-coat after 4 hours.

COMPOSITION

Pigment

Titanium Dioxide
Colour Pigments
Special Extenders

Binder

Styrene – Acrylic

Solvent

Water

COVERAGE



86-107 sqft per liter on smooth surfaces per coat.
The figure coated here would be an approximate value due to variations of surface conditions. Hence if in doubt apply small trial area.

VOLUME SOLIDS

EU limits value for this product (cat. A/a):
75 g/l (2007) / 30 g/l (2010)
This product contains max. 29 g/l VOC

COATING SYSTEM

For Water Tanks

Apply three coats

For Blind wall


Apply two coats
or
Apply three coats
(if no primer requires)

PREPARATION

New Surface

Surfaces must be sound, clean, suitably dry and free from anything that will interfere with the adhesion of the materials to be applied. Patch holes and cracks with Robbialac Skimkote. Apply one coat of Robbialac Aqua Block and allow drying before painting.

Application

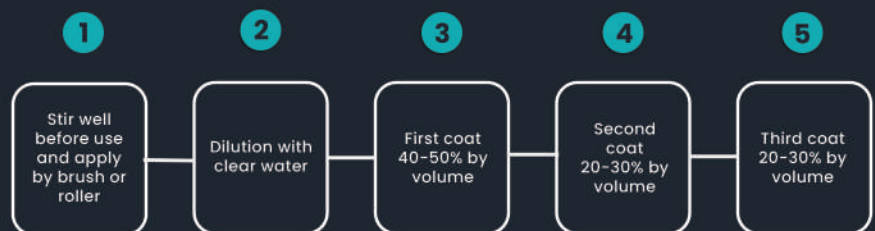

CLEANING

Return surplus material to container, wash with clean water immediately after use.

HEALTH AND SAFETY

Please refer to the Safety, Health and Environmental Information on the container and Material Safety Data Sheet. When preparing all surfaces avoid the inhalation of dust and/or metal particles. Wear a suitable facemask. Store in secure, dry conditions and inaccessible to children or animals. Containers should be kept closed during storage. Do not empty into drains, watercourses or access routes to septic tanks.

DISCLAIMER

The information provided on this data sheet is not intended to be complete & is provided as general advice only. It is the responsibility of the user to ensure that the product is suitable for the purpose for which wishes to use it. As we have no control over the treatment of the product, the standard of surface preparation of the substrate or other factor affecting the use of this product, we are not responsible for its performance nor would we accept any liability what so ever or how ever so ever arising from the use of this product unless specifically agreed to in writing by us. The information contained in this data sheet may be modified by us from time to time, and without notice in the light of our experience & continuous product development.